


SPUR GEARS-PIN HUB

20° PRESSURE ANGLE


1/10 CIRCULAR PITCH
3/16 FACE 1/4 BORE

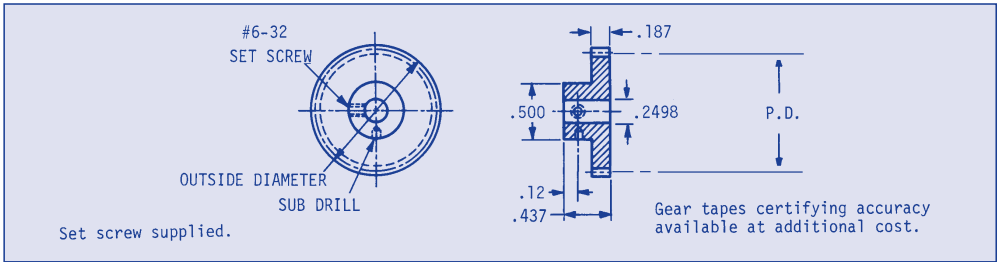

Specifications: Unless otherwise stated, quality #10 or better gears will be supplied. When ordering Q12 or Q14, please supply the catalog number and add Q12 or Q14. **ORDER BY CATALOG NUMBER**

Gear Class	Total Composite Tolerance	Tooth to Tooth Composite Tolerance	Bore	Pitch Dia.	Outside Dia.
Q10	.001	.0004	+ .0005	- .001	- .002
Q12	.0005	.0003	+ .0003	- .0007	- .0015
Q14	.00025	.0002	+ .0002	- .0005	- .001
# 303 STAINLESS STEEL	2024-T4 ALUMINUM ANODIZED BEFORE CUTTING	GEAR DATA			
Cat. No.	Cat. No.	No. of Teeth	Pitch Diameter		Outside Diameter
LAS-A1-20	LAA-A1-20	20	.6366		.700
LAS-A1-25	LAA-A1-25	25	.7958		.859
LAS-A1-30	LAA-A1-30	30	.9549		1.018
LAS-A1-35	LAA-A1-35	35	1.1141		1.178
LAS-A1-40	LAA-A1-40	40	1.2732		1.337

1/10 CIRCULAR PITCH 1/4 FACE 1/4 BORE

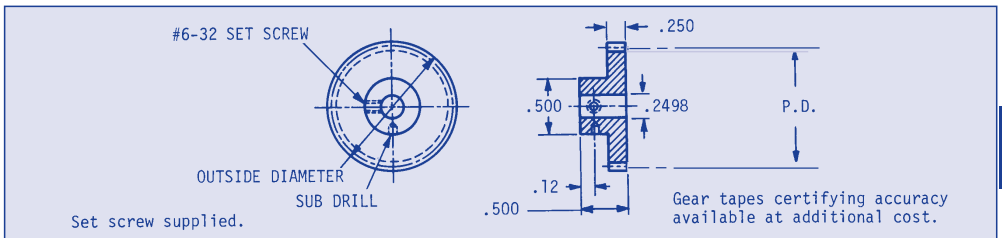

Material: 17-4 Ph stainless steel
Heat treated to Rc 36 min.

ORDER BY CATALOG NUMBER

GEAR DATA				
Cat. No.	No. of Teeth	Pitch Diameter		Outside Diameter
LAS-A2-20	20	.6366		.700
LAS-A2-40	40	1.2732		1.337

NORDEX

(800) 243-0986
In CT (203) 775-4877

4L