


# SPUR GEARS-SPLIT HUB

20° PRESSURE ANGLE

**96 PITCH  
1/8 FACE  
1/8 BORE**

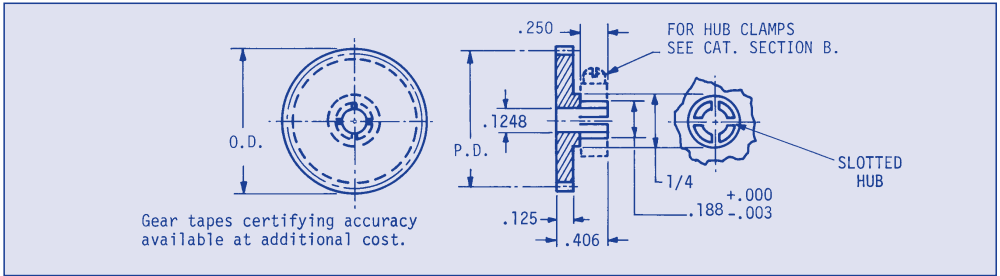

**Specifications:** Unless otherwise stated, quality #10 or better gears will be supplied. When ordering Q12 or Q14 please supply the catalog number and add Q12 or Q14.

Gear Class	Total Composite Tolerance	Tooth to Tooth Composite Tolerance	Bore	Pitch Dia.	Outside Dia.
Q10	.001	.0004	+ .0005	-.001	-.002
Q12	.0005	.0003	+ .0003	-.0007	-.0015
Q14	.00025	.0002	+ .0002	-.0005	-.001

## ORDER BY CATALOG NUMBER

# 303 STAINLESS STEEL	2024-T4 ALUMINUM ANODIZED BEFORE CUTTING	GEAR DATA		
Cat. No.	Cat. No.	No. of Teeth	Pitch Diameter	Outside Diameter
*LBS-J2-24	*LBA-J2-24	24	.2500	.271
*LBS-J2-25	*LBA-J2-25	25	.2604	.281
*LBS-J2-26	*LBA-J2-26	26	.2708	.292
LBS-J2-28	LBA-J2-28	28	.2916	.313
LBS-J2-30	LBA-J2-30	30	.3125	.333
LBS-J2-32	LBA-J2-32	32	.3333	.354
LBS-J2-34	LBA-J2-34	34	.3541	.375
LBS-J2-35	LBA-J2-35	35	.3645	.385
LBS-J2-36	LBA-J2-36	36	.3750	.396
LBS-J2-38	LBA-J2-38	38	.3958	.417
LBS-J2-40	LBA-J2-40	40	.4166	.438
LBS-J2-44	LBA-J2-44	44	.4583	.479
LBS-J2-48	LBA-J2-48	48	.5000	.521
LBS-J2-50	LBA-J2-50	50	.5208	.542
LBS-J2-52	LBA-J2-52	52	.5416	.563
LBS-J2-54	LBA-J2-54	54	.5625	.583
LBS-J2-56	LBA-J2-56	56	.5833	.604
LBS-J2-58	LBA-J2-58	58	.6041	.625
LBS-J2-60	LBA-J2-60	60	.6250	.646
LBS-J2-64	LBA-J2-64	64	.6666	.688
LBS-J2-72	LBA-J2-72	72	.7500	.771
LBS-J2-84	LBA-J2-84	84	.8750	.896
LBS-J2-96	LBA-J2-96	96	1.0000	1.021
LBS-J2-100	LBA-J2-100	100	1.0416	1.063
LBS-J2-108	LBA-J2-108	108	1.1250	1.146
LBS-J2-120	LBA-J2-120	120	1.2500	1.271
LBS-J2-127	LBA-J2-127	127	1.3229	1.344
LBS-J2-132	LBA-J2-132	132	1.3750	1.396
LBS-J2-144	LBA-J2-144	144	1.5000	1.521
LBS-J2-168	LBA-J2-168	168	1.7500	1.771

**NORDEX**

\* Gear hob cuts into 1/4" hub.

**(800) 243-0986**  
In CT (203) 775-4877

**68L**